




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 7/08, H04B 7/26</b>		(11) International Publication Number: <b>WO 96/17455</b>	
<b>A1</b>		(43) International Publication Date: 6 June 1996 (06.06.96)	
(21) International Application Number: <b>PCT/SE95/01382</b>		(81) Designated States: US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 21 November 1995 (21.11.95)		Published With international search report.	
(30) Priority Data: 9404121-7                      29 November 1994 (29.11.94)      SE			
(71) Applicant (for all designated States except US): TELIA AB [SE/SE]; S-123 86 Farsta (SE).			
(72) Inventors; and (75) Inventors/Applicants (for US only): ENGSTRÖM, Bo [SE/SE]; Blidvägen 189, S-976 32 Luleå (SE). ISAKS- SON, Mikael [SE/SE]; Borgmästarevägen 7, S-973 42 Luleå (SE). LARSSON, Roger [SE/SE]; Docentvägen 53, S-977 52 Luleå (SE). OLOFSSON, Sven-Rune [SE/SE]; Malmuddsvägen 9, S-971 52 Luleå (SE). UNNEBÄCK, Michael [SE/SE]; Forskarvägen 139, S-977 53 Luleå (SE). ÖQVIST, Göran [SE/SE]; Hagaplan 7, S-974 41 Luleå (SE). ÖSTBERG, Christer [SE/SE]; Trossvägen 37, S-973 41 Luleå (SE). OLSSON, Lennart [SE/SE]; Majvägen 39, S-973 31 Luleå (SE).			
(74) Agent: KARLSSON, Berne; Telia Research AB, Rudsjöterrassen 2, S-136 80 Haninge (SE).			

(54) Title: METHOD FOR SYNCHRONIZATION OF TRANSMITTER AND RECEIVER AT MOBILE RADIO SYSTEM

## (57) Abstract

The present invention relates to a method at mobile radio system for synchronization of transmitter and receiver. The system relates to MC/DS-CDMA-system. In the system information is transmitted digitally in frames. For the purpose a data channel, a pilot channel and a synchronization channel are created. In the data channel the data blocks (D0, D1, D2, etc.) are separated by a guard space  $\Delta$ . In the pilot channel, respective the synchronization channel, the information is arranged in blocks which are synchronous with each other. The repeating distance, (A), of the pilot channel, corresponds to the length of

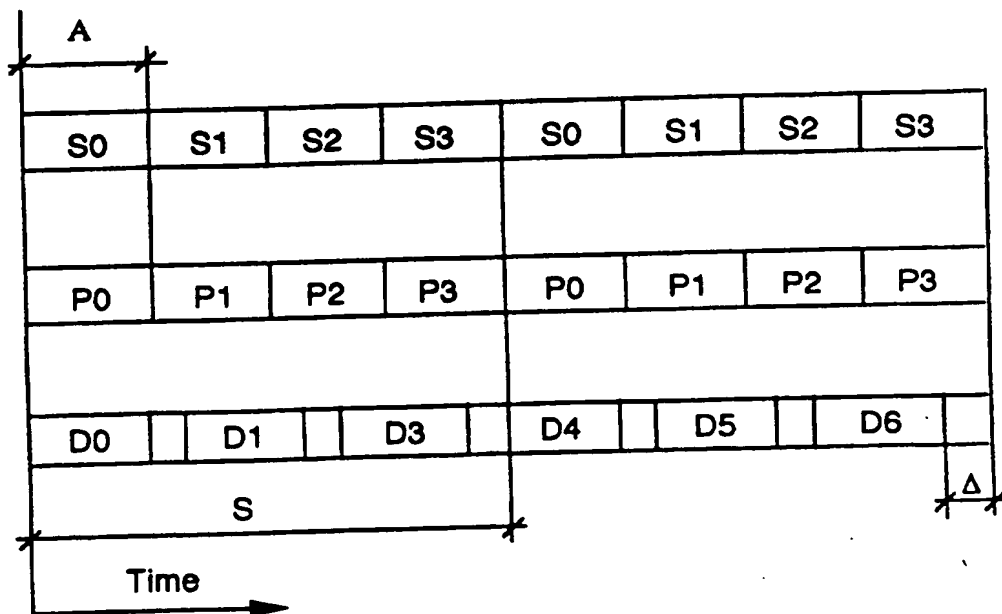

one of the data blocks (D0, D1, D2, etc.). The repeating distance for the synchronization channel is S, corresponding to a number of blocks in the data channel. In the synchronization channel information is introduced into the blocks which indicate their relation to the data channel. The method in this way allows an identification of the position of the pilot channel, which indicates the position of the synchronization channel, at which a decoding of the information of the synchronization channel appoints the position of the data channel.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam

## TITLE OF THE INVENTION

Method for synchronization of transmitter and receiver  
at mobile radio system.

5

## TECHNICAL FIELD

The present invention relates to synchronization of  
10 MC/DS-CDMA-systems. The invention accordingly relates to  
mobile radio systems for multicarrier/direct sequence  
code divided multiple access, MC/DS-CDMA. The technology  
is a combination of OFDM, orthogonal frequency division  
multiplexing, and traditional DS-CDMA, direct sequence  
15 CDMA.

## PRIOR ART

20 It is previously known to transmit information in a data  
channel where the digital information is divided into a  
number of different blocks. The blocks are separated by  
guard spaces. The task of the guard spaces is to deal  
with the time dispersion on the channel. Further, it is  
25 known to arrange a pilot channel with the same block  
division and guard spaces as the data channel.  
Transmission units transmits a cyclic pilot sequence  
which is unique within the range possible to listen in  
to.

30

A base station always transmits a unique pilot sequence.  
This causes that a recently turned on mobile station  
identifies the base station/stations which are located  
within the range possible to listen in to. A mobile  
35 station transmits one of two different types of pilot  
sequences. A so called random access sequence is

transmitted when a mobile station wants to make a connection to a base station. By the random access sequence being used only for this purpose, and being unique for each mobile station, the base station knows  
5 that a mobile station wants to establish a connection to it. The other type of pilot sequence the mobile station transmits during an established connection. The mobile station has been given both uplink sequences from the base station.

10

In the German patent document DE 3401727 is described a TDM-system for transmission of digital information which uses a synchronization channel. The synchronization channel also can contain other information, as for  
15 instance information about other performing channels.

In the European patent document EP 606941 is described a device for synchronization of a local oscillator in a OFDM-system.

20

The document WO 92-5646 describes reception of OFDM-signals. To achieve synchronization, a multiplication with the complex conjugate of a known reference is performed.

25

In the document WO 92-16063 is described reception and synchronization in an OFDM-system. According to the document, reference symbols are placed at least one carrier from the edge of the frequency raster, and at  
30 least two carriers from other reference symbols.

The European document EP 218966 describes a TDMA-system intended for radio transmission. To achieve a synchronization as good as possible, a special signal is  
35 introduced into each free time slot.

## DESCRIPTION OF THE INVENTION

## TECHNICAL PROBLEM

5

At transmission of packet switched digital signals between a transmitting and a receiving equipment in a communications system it is necessary to have the possibility to synchronize the signal transmission to obtain usable information in the receiving equipment. For the message transport between the transmitter and the receiver a number of access methods have been developed, of which MC/DS-CDMA is one. The method is a combination of OFDM and traditional DS-CDMA.

15

In an OFDM-system the pilot frequencies often become long, for instance  $N=512$  och  $1024$ . Such long correlations are possible but very voluminous to implement by means of digital hardware for falting. Since one in an OFDM-system always has the signals available both in the time and frequency plane, it is attractive to implement the correlation by means of multiplication in the frequency plane. At that, one exchanges a process which demands  $N*N$  complex multiplications per frame for another which demands  $N$  complex multiplications per frame. This is, however, not easy to perform since the OFDM-system operates with guard spaces ( $\Delta$ ). The Fouriertransform of the data channel is performed with the block length  $N$ . If the pilot channel is synchronous with the data channel, the pilot channel is cyclic with the repeating distance  $N+\Delta$ . In order to perform the correlation in the frequency plane, one has to use a block length which is equal to the repeating distance. With this arrangement one cannot, accordingly, use the same block of data for the

35

Fourier transforms, and the method is consequently not usable.

It is, accordingly, desirable to find methods where the same block length can be used both in the data channel and in the pilot channel. The present invention is intended to solve the above indicated problem.

## 10 THE SOLUTION

The present invention relates to a method for synchronization of MC/DS-CDMA-systems. The information is transmitted in a data channel in blocks which are separated by guard spaces. In a second channel are arranged blocks which follow each other successively without guard spaces between the blocks. The blocks in the second channel are placed in relation to the blocks in the data channel, at which the relation between the blocks appoints the position of the data channel, and synchronization of the receiver and the transmitter is achieved.

The invention accordingly relates to a system where transmitter and receiver at mobile radio system transmits information digitally in frames. A number of frames form a block, and different blocks in the data channel are separated by guard spaces. At least a second channel is created. The information in the second channel is divided into blocks, and the blocks are arranged in direct sequence after each other without guard spaces between the blocks. The blocks in the at least second channel are displaced in relation to the blocks in the data channel. A block in the second channel is viewed in relation to blocks in the data channel, at which the relation of the blocks to each

other identifies the position of the data channel, at which synchronization of the receiver and the transmitter is achieved.

5 The information in the at least second channel is cyclic. The blocks in the data channel and in the at least second channel have the same length. The cycle in the second channel corresponds to a certain number of blocks in the data channel. At least the second channel  
10 comprises a synchronization channel and a pilot channel. Blocks in the synchronization channel are arranged in cyclic sequence. The cycle for the blocks in the synchronization channel is given the same length as a certain number of blocks in the data channel.

15 Information in the blocks in the synchronization channel indicates the relation of the block to the data channel. Decoding of the information in the synchronization channel indicates the position of the data channel. The  
20 blocks of the pilot channel are arranged after each other without guard spaces between the blocks. The blocks of the pilot channel are synchronized with the blocks in the synchronization channel.

25 The blocks of the pilot channel are cyclically repeated with a period corresponding to the length of a block in the data channel. The position of the pilot channel indicates the position of the synchronization channel. The same blocks and data are used for decoding of  
30 information and synchronization, which is made possible by the length of the blocks in the data channel and the pilot channel being given the same length.  
The system is an MC/DS-CDMA-system.

The invention consequently relates to a method at mobile radio system for synchronization of transmitter and receiver. The system relates to an MC/DS-CDMA-system. In the system, information is transmitted digitally in frames, and a data channel, a pilot channel and a synchronization channel are created. In the data channel the data blocks D0, D1, D2 etc, are separated by guard spaces  $\Delta$ . In the pilot- respective synchronization channel the information is arranged in synchronous blocks. The repeating distance of the pilot channel, A, corresponds to the length of one of the data blocks D0, D1, D2 etc. The repeating distance of the synchronization channel, S, corresponds to a number of blocks in the data channel. In the synchronization channel, information is introduced into the blocks and indicates their relation to the data channel. Identification of the position of the pilot channel indicates the position of the data channel, and the information in the synchronization channel indicates the position of the data channel.

#### ADVANTAGES

The present invention allows that correlation by means of multiplication in the frequency plane can be performed with N complex multiplications per frame. This should be compared with  $N^2$  complex multiplications which in other cases would be required.

The Fouriertransform is performed on data channel and pilot channel on blocks of the same length. In the normal case the Fouriertransform had to be performed on different lengths of blocks in the data channel respective for the pilot channel.

Further one utilizes the same blocks of data for Fouriertransform on the channels.

5 The synchronization channel indicates a relative relationship to the frames in the data channel. This is utilized for appointing where in the data channel one is at present.

10 The pilot channel indicates the position of the synchronization channel. Furthermore the same data are used for information decoding and synchronization.

#### DESCRIPTION OF FIGURES

15 Figure 1 shows block division for a data channel with the blocks D1, D2, D3 etc, separated by a guard space  $\Delta$ .

20 Figure 2 shows a data channel with the blocks D0, D1, D2 etc, separated by guard space  $\Delta$ . Further is shown a pilot channel, with the blocks P0, which are directly following each other. In addition there is in the figure shown a synchronization channel with the blocks S0, S1, S2 etc.

25 Figure 3 shows in principle a base station, BS, and a mobile station, MS.

30

#### PREFERRED EMBODIMENT

In the following the invention is described with reference to the figures and the designations therein.

35

In a mobile radio system according to Figure 3 base stations, BS, are arranged. The mentioned base stations communicate with mobile stations, MS. The information is digitally transmitted in frames.

5 MC/DS-CDMA means Multi Carrier / Direct Sequence Code Divided Multiple Access. The technology is a combination of OFDM, Orthogonal Frequency Division Multiplexing, and traditional DS-CDMA (Direct Sequence CDMA). The principle for MC/DS-CDMA is based on the information  
10 being divided into frames. The transmitted time discrete signal  $s_k(i)$  for the frame  $k$  with the length  $T$ , and with  $N$  sample, can be described as:

$$15 \quad s_k(i) = a_0 \sum_{n=0}^{\frac{N-1}{M}-1} c_n e^{-j2\pi \xi_k(f_n)t_i} \dots + a_{M-1} \sum_{n=\frac{N-1}{M}(M-1)}^{\frac{N-1}{M}M-1} c_n e^{-j2\pi \xi_k(f_n)t_i} + a \sum_{n=N-1}^{N-1} e^{-j2\pi \xi_k(f_n)t_i}$$

Where  $i = (N-\Delta), \dots, (N-1), 0, \dots, (N-1)$

A frame  $F_k$  is then represented by:

$$20 \quad F_k = [s_k(N-\Delta), \dots, s_k(N-1), s_k(0), \dots, s_k(N-1)]$$

$\Delta$  constitutes the so called guard space which aims at managing the time dispersion on the channel. For making it possible to perform an FFT, then  $N=2^p$ , where  $p$  is an  
25 integer. The number of symbols which are transmitted per frame is indicated by  $M$ . The relation between the total number of subcarriers  $N$  and the number of subcarriers which each symbol is spread out over (the distribution factor)  $R$ , is then indicated by:

30

$$MR = N-1$$

$N-1$  is the number of subcarriers which in a frame are active, i.e. carriers of information. Consequently then the number of inactive subcarriers is 1 (lower-case letter  $L$ ).  $c_n$  is the distribution sequence by which  
5 every symbol is distributed. This can be repetitive over each symbol or have the same length as the frame. The function  $\xi_k(f_n)$  performs the interleaving in the frequency plane according to suitably chosen algorithm. The combination between the last sum in the formula and  
10  $\xi_k(f_n)$  accounts for the shaping of the spectra with a necessary pass band beside the active subcarriers in order to, after that, to be able to filter away Nyquist-copies.

15 The technology is intended to be used in a cellular system for mobile radio communication with full duplex, where the connection from the stationary unit (the Base station, BS) to the mobile unit (the mobile station, MS) is denominated as the downlink. The reverse direction is  
20 called the uplink.

The synchronization method is based upon that each uplink or downlink consists of at least two coded, physical channels. These are called data channel and  
25 pilot channel according to Figure 1. Each transmitting unit, base station or mobile station, transmits a cyclic pilot sequence which is unique within the area which is possible to listen in to.

30 In the data channel blocks are called  $D_0$ ,  $D_1$ ,  $D_2$  etc, separated by guard spaces  $\Delta$ . Further a pilot channel is arranged with the blocks  $P_0$  where guard space  $\Delta$  between the blocks is lacking.

35 A base station always transmits a unique pilot sequence. This makes that a recently turned on mobile station

identifies the base station/stations which are within the covered range. A mobile station transmits one of two different types of pilot sequences. A so called random access sequence is transmitted from a mobile station  
5 which wants to make a connection to a base station. By the random access sequence being used for only this purpose, and being unique for each base station, the base station knows that a mobile station wants to get into contact with it. The other type of pilot sequence  
10 is transmitted from the mobile station during an established connection. The sequence is unique for each transmitting mobile station. Both uplink sequences have the mobile station been given by the base station. Allocation of the uplink sequence is performed according  
15 to methods which are well known for persons with expert knowledge in the field.

To be able to find a pilot sequence, and also after that to be able to use the sequence for synchronization in  
20 time and frequency and for channel estimation as well, one has to perform correlations in the receiver. In an OFDM-system the pilot sequences become long, for instance 512 or 1024. Such long correlations are possible but voluminous to implement by means of digital  
25 hardware for falting. Since one in an OFDM-system always has the signals available both in the time and frequency plane, it is desirable to implement the correlation by means of multiplication in the frequency plane. In this case one exchanges a process which requires  $N \cdot N$  complex  
30 multiplications per frame for another with  $N$  complex multiplications per frame. To perform this in an OFDM-system is, however, not simple with guard spaces being used. The Fouriertransform of the data channel is performed with a block lenght  $N$ . If the pilot channel is  
35 synchronous with the data channel, the pilot channel is cyclic and the repeating distance is  $N + \Delta$ . In order to

perform correlations in the frequency plane one has to use a block length which is equal to the repeating distance. The arrangement consequently does not allow that one uses the same block of data for the  
5 Fourier transforms and the method is therefore not practically usable.

The fundamental idea of the invention is shown in Figure 2. In this case the pilot channel is repeated with  
10 repeating distance N without any guard space  $\Delta$  being added. The position of the pilot channel in relation to the data channel is at that changed from frame to frame. In the figure this is evident from the fact that the pilot channels P0 get different positions in relation to  
15 the data channel D0, D1, D2 etc. Further is introduced a synchronization channel where the frames are modulated and among other things marked with the relative position of the frame in relation to the frames in the data channel. In the figure the synchronization frames are  
20 designated S0, S1, S2 etc. The synchronization channel is synchronous with the pilot channel. By identifying the position of the pilot channel the position of the synchronization channel is also identifiable. The information of the synchronization channel is decoded,  
25 at which the position of the data channel is identifiable. By the repeating distance of the pilot channel being equal to the block length of the data channel, the same block of data is usable for information decoding and synchronization.

30

The invention is not restricted to the above described or to the patent claims, but may be subjected to modifications within the frame of the patent idea.

## PATENT CLAIMS

1. Method for synchronization of transmitter and receiver at mobile radio systems, at which information transmission is performed digitally in frames, and a number of frames create a number of blocks, and blocks in a data channel are separated by guard spaces, and at least one second channel is created, characterized in that the information in the at least second channel is divided into blocks, that the blocks in the second channel are arranged in direct sequence after each other without guard spaces between the blocks, that the blocks in the at least second channel are displaced in relation to the blocks in the data channel, and that a block in the second channel is related to blocks in the data channel, at which the relation of the blocks to each other identifies the position of the data channel, at which synchronization of receiver and the transmitter is achieved.
2. Method according to patent claim 1, characterized in that the information in the at least second data channel is cyclic.
3. Method according to patent claim 1 or 2, characterized in that the blocks in the data channel in the at least second channel have the same length.
4. Method according to any of the previous patent claims, characterized in that the cycle in the second channel corresponds to a certain number of blocks in the data channel.

5. Method according to any of the previous patent claims, characterized in that the at least second channel comprises a synchronization channel and a pilot channel.

5

6. Method according to any of the previous patent claims, characterized in that blocks in the synchronization channel are arranged in a cyclic sequence.

10

7. Method according to any of the previous patent claims, characterized in that the cycle for the blocks in the synchronization channel is given the same length as a certain number of blocks in the data channel.

15

8. Method according to any of the previous patent claims, characterized in that the information in the blocks in the synchronization channel indicates the relation of the blocks to the data channel.

20

9. Method according to any of the previous patent claims, characterized in that decoding of the information in the synchronization channel indicates the position of the data channel.

25

10. Method according to any of the previous patent claims, characterized in that the blocks of the pilot channel are arranged after each other without guard spaces between the blocks, and that the blocks of the pilot channel are synchronized with the blocks in the synchronization channel.

30

35

11. Method according to any of the previous patent  
claims, characterized in that the blocks of  
the pilot channel are repeated cyclically with a period  
5 corresponding to the length of a block in the data  
channel.

12. Method according to any of the previous patent  
claims, characterized in that the position  
10 of the pilot channel indicates the position of the  
synchronization channel.

13. Method according to any of the previous patent  
claims, characterized in that the same block  
15 of data is utilized for information decoding and  
synchronization, which is made possible by the block  
length in the data channel and the pilot channel being  
given the same length.

20 14. Method according to any of the previous patent  
claims, characterized in that the system is  
an MC/DS-CDMA-system.

15. Method according to any of the previous patent  
25 claims, characterized in that the  
correlation is implemented by means of multiplication in  
the frequency plane.

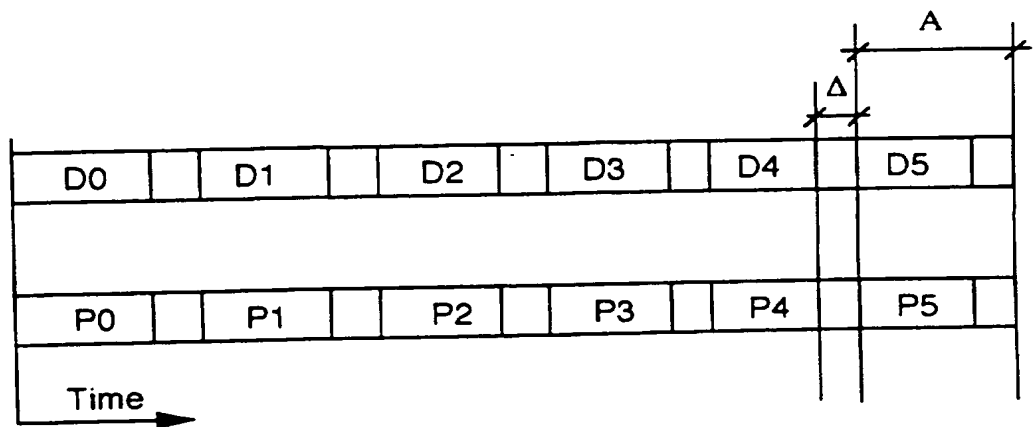


Fig 1

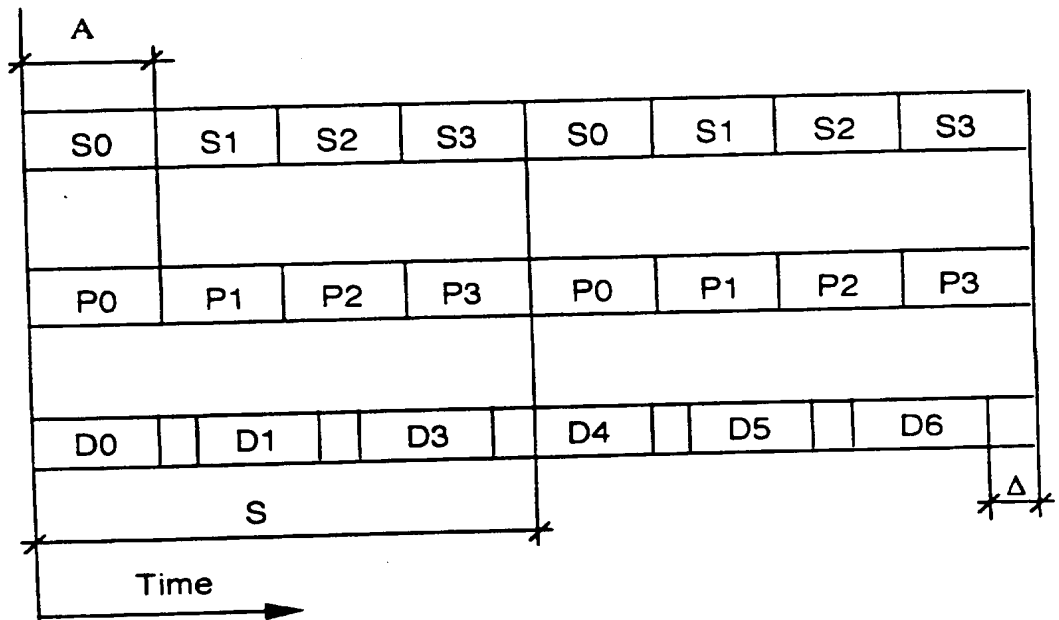


Fig 2



Fig 3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01382

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04L 7/08, H04B 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B, H04J, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SE 500986 C2 (TELIA AB), 17 October 1994 (17.10.94), page 4, line 6 - page 6, line 7, figures 2,3 --	1-15
A	EP 0218966 A2 (ROBERT BOSCH GMBH), 22 April 1987 (22.04.87), page 2, line 18 - page 3, line 11, figures 1-3 --	1-15
A	DE 3401727 C2 (ANT NACHRICHTENTECHNIK GMBH), 8 October 1987 (08.10.87), column 2, line 33 - column 3, line 28, see the figure --	1-15

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

26 February 1996

Name and mailing address of the ISA/  
Swedish Patent Office

Date of mailing of the international search report

01-03-1996

Authorized officer

Christian Pasch

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01382

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5208812 A (MICHAEL T DUDEK ET AL), 4 May 1993 (04.05.93), abstract  -----	1-15

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

05/02/96

International application No.  
PCT/SE 95/01382

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
SE-C2-	500986	17/10/94	SE-A-	9302453	17/10/94
			WO-A-	9503656	02/02/95
EP-A2-	0218966	22/04/87	DE-A,C-	3537105	23/04/87
DE-C2-	3401727	08/10/87	NONE		
US-A-	5208812	04/05/93	AU-B,B-	630160	22/10/92
			AU-B-	631186	19/11/92
			AU-B-	631187	19/11/92
			AU-A-	5029590	24/08/90
			AU-A-	5030790	24/08/90
			AU-A-	5032090	24/08/90
			CN-A-	1044559	08/08/90
			DE-D,T-	69019624	14/12/95
			EP-A-	0380372	01/08/90
			EP-A-	0383447	22/08/90
			EP-A-	0386877	12/09/90
			EP-A-	0409948	30/01/91
			EP-A,B-	0411083	06/02/91
			EP-A-	0414845	06/03/91
			JP-T-	3503711	15/08/91
			JP-T-	3503830	22/08/91
			JP-T-	3505960	19/12/91
			PT-B-	92982	28/02/94
			PT-B-	92984	30/06/95
			US-A-	5228026	13/07/93
			US-A-	5416779	16/05/95
			WO-A-	9009071	09/08/90
			WO-A-	9009072	09/08/90
			WO-A-	9009073	09/08/90